

# Product Specifications

## L2+ Industrial 8-Port 10/100/1000T 802.3at PoE + 2-Port 100/1000X SFP Managed Switch with Wide Operating Temperature

### IGS-10020HPT

Version 3.0

This document contains confidential proprietary information and is property of PLANET. The contents of this document should not be disclosed to unauthorized persons without the written consent of PLANET.

**Change History:**

Revision:	Date:	Author:	Change List
Version 3.0	2018/08/22	Marc Liao	Change thermal design. Add DC 12V power input. New firmware SDK release.
Version 2.0	2016/03/04	Neo	Change thermal design
Version 1.3	2015/03/05	Jos	Added L2+ feature
Version 1.0	2013/01/02	Neo	Initial Release
Version 0.9	2012/7/13	Norman	Draft version

<b>Author:</b>	Marc Liao	<b>Editor:</b>	Marc Liao
<b>Reviewed By:</b>		<b>Approved By:</b>	Kent Kang


## 1. PRODUCT DESCRIPTION



### Environmentally Hardened Design

PLANET IGS-10020HPT Industrial 8-port Gigabit 802.3at PoE+ Switch is equipped with a rugged IP30 metal case for stable operation in heavy industrial demanding environments. Thus, the IGS-10020HPT provides a high level of immunity against electromagnetic interference and heavy electrical surges which are usually found on plant floors or in curbside traffic control cabinets.

Being able to operate under wide temperature range from -40 to 75 degrees C, the IGS-10020HPT can be placed in almost any difficult environment. The IGS-10020HPT also allows either DIN-rail or wall mounting for efficient use of cabinet space.

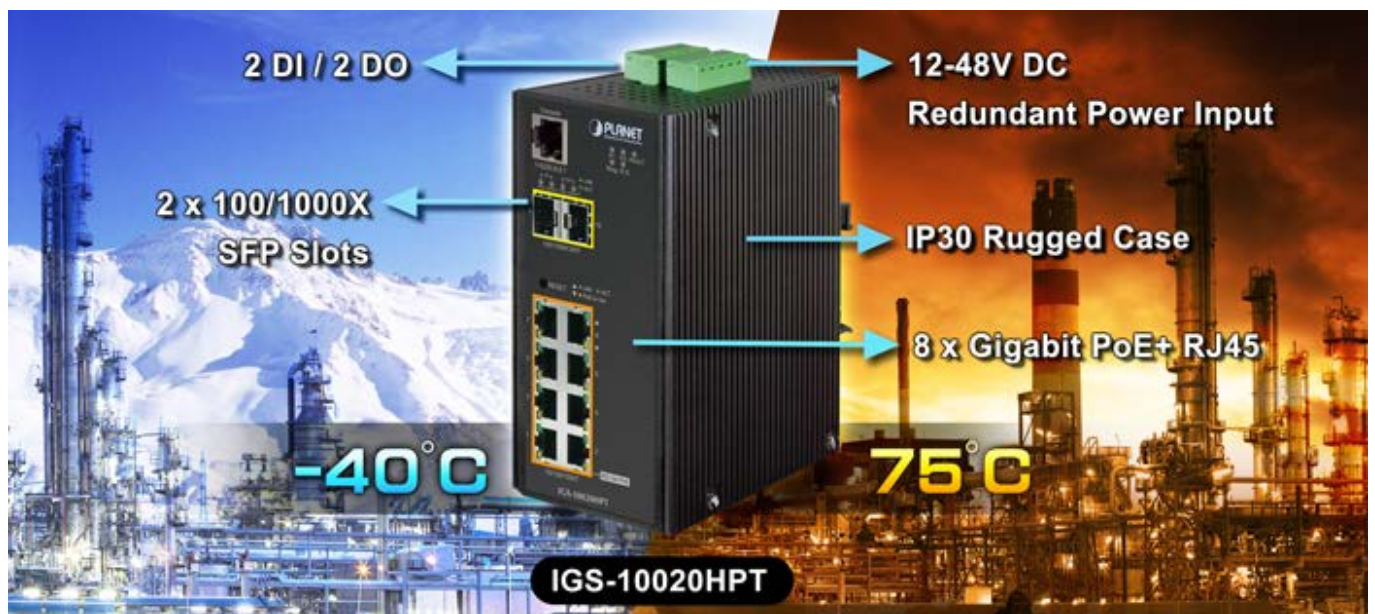

## Redundant Ring, Fast Recovery for Critical Network Applications

The IGS-10020HPT supports redundant ring technology and features strong, rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates advanced **ITU-T G.8032 ERPS (Ethernet Ring Protection Switching)** technology, Spanning Tree Protocol (802.1s MSTP), and **redundant power** input system into customer's industrial automation network to enhance system reliability and uptime in harsh factory environments.

The IGS-10020HPT also protects customer's industrial network connectivity with switching recovery capability that is used for implementing fault tolerant ring and mesh network architectures. If the Industrial network was interrupted accidentally, the fault recovery times could be **less than 50ms** to quickly bring the network back to normal operation.

## High Power PoE for Security and Public Service Applications

To fulfill the demand of High Power PoE for network applications with Gigabit speed transmission under wide temperature, the IGS-10020HPT provides 8 10/100/1000Mbps ports featuring **IEEE 802.3at** Power over Ethernet Plus (PoE+) that combines up to **36-watt** power output and data per port over one Cat5E/6 Ethernet cable. As the whole system comes with a total **240-watt** PoE budget, the IGS-10020HPT is designed specifically to satisfy the growing demand of higher power consuming network PDs (powered devices) such as multi-channel (802.11a/b/g/n) wireless LAN access points, PTZ (Pan, Tilt & Zoom)/Speed Dome network cameras and other PoE network devices, doubling that of the current conventional 802.3af PoE.

## Convenient and Smart ONVIF Devices with Detection Feature

PLANET has newly developed an awesome feature -- ONVIF Support -- which is specifically designed for co-operating with video IP surveillances. From the IGS-10020HPT's GUI, you just need one click to search and show all of the ONVIF devices via network application. In addition, you can upload floor images to the switch and can remotely monitor or inspect an assembly line. Moreover, you can get real-time surveillance information and online/offline status; the PoE reboot can be controlled from the GUI.

## Built-in Unique PoE Functions for Surveillance Management

As an Industrial managed PoE Switch for surveillance network, the IGS-10020HPT features the following intelligent PoE management functions:

- **PD Alive Check**
- **Scheduled Power Recycling**
- **PoE Schedule**
- **SMTP/SNMP Trap Event Alert**

## Intelligent Powered Device Alive Check

The IGS-10020HPT PoE Switch can be configured to monitor connected PD's status in real time via ping action. Once the PD stops working and responding, the IGS-10020HPT will recycle the PoE port power and bring the PD back to work. It also greatly enhances the reliability in that the PoE port will reset the PD power, thus reducing administrator's management burden.

## Scheduled Power Recycling

The IGS-10020HPT allows each of the connected PoE IP cameras or PoE wireless access points to reboot at a specific time each week. Therefore, it will reduce the chance of IP camera or AP crash resulting from buffer overflow.

### **PoE Schedule for Energy Saving**

Under the trend of energy saving worldwide and contributing to environmental protection on the Earth, the IGS-10020HPT can effectively control the power supply besides its capability of giving high watts power. The built-in “**PoE schedule**” function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs or enterprises save power and money.

### **SMTP/SNMP Trap Event Alert**

The IGS-10020HPT provides event alert function to help to diagnose the abnormal device owing to whether or not there is a break of the network connection, or the rebooting response.

### **Effective Alarm Alert for Better Protection**

The IGS-10020HPT supports a Fault Alarm feature which can alert the users when there is something wrong with the switches. With this ideal feature, the users would not have to waste time finding where the problem is. It will help to save time and human resource.

### **Digital Input and Digital Output for External Alarm**

The IGS-10020HPT supports Digital Input and Digital Output on its upper panel. This external alarm enables users to use Digital Input to detect and log external device status (such as door intrusion detector), and send event alarm to the administrators. The Digital Output could be used to alarm the administrators if the IGS-10020HPT port shows link down, link up or power failure.

### **Layer 3 IPv4 and IPv6 Software VLAN Routing for Secure and Flexible Management**

To help customers stay on top of their businesses, the IGS-10020HPT not only provides ultra high transmission performance and excellent Layer 2 technologies, but also IPv4/IPv6 software VLAN routing feature which allows to crossover different VLANs and different IP addresses for the purpose of having a highly-secure, flexible management and simpler networking application.

### **Robust Layer 2 Features**

The IGS-10020HPT can be programmed for advanced switch management functions such as dynamic port link aggregation, Q-in-Q VLAN, private VLAN, Rapid Spanning Tree Protocol, Layer 2 to Layer 4 QoS, bandwidth control and IGMP snooping. The IGS-10020HPT provides 802.1Q tagged VLAN, and the VLAN groups allowed will be maximally up to 255. Via aggregation of supporting ports, the IGS-10020HPT allows the operation of a high-speed trunk combining multiple ports. It enables a maximum of up to 5 trunk groups with 2 ports per trunk group, and supports fail-over as well.

### **Efficient Secure Management**

For efficient management, the IGS-10020HPT is equipped with console, Web and SNMP management interfaces. With the built-in Web-based management interface, the IGS-10020HPT offers an easy-to-use, platform-independent management and configuration facility. For text-based management, the IGS-10020HPT can be accessed via Telnet and the console port. Moreover, it also offers secure remote management via any standard-based management software by supporting SNMPv3 connection which encrypts the packet content at each session.

## Powerful Security

The IGS-10020HPT offers comprehensive **Layer 2 to Layer 4 Access Control List (ACL)** for enforcing security to the edge. It can be used to restrict network access by denying packets based on source and destination IP address, TCP/UDP ports or defined typical network applications. Its protection mechanism also comprises **802.1x Port-based** and **MAC-based** user and device authentication. With the **private VLAN** function, communication between edge ports can be prevented to ensure user privacy. The network administrators can now construct highly-secure corporate networks with considerably less time and effort than before.

## Cybersecurity Network Solution to Minimize Security Risks

The cybersecurity features that virtually need no effort and cost to have included the protection of the switch management and the enhanced security of the mission-critical network. Both SSH and SSL protocols are utilized to provide strong protection against advanced threats. The network administrator can now construct highly-secure corporate networks with considerably less time and effort than before.

## Flexibility and Extension Solution

The additional two mini-GBIC slots built in the IGS-10020HPT support dual speed, 100BASE-FX and 1000BASE-SX/LX SFP (Small Form-factor Pluggable) fiber-optic modules, meaning the administrator now can flexibly choose the suitable SFP transceiver according to not only the transmission distance but also the transmission speed required. The distance can be extended from 550 meters to 2km (multi-mode fiber) and to 10/20/30/40/50/60/70/120 kilometers (single-mode fiber or WDM fiber). They are well suited for applications within the enterprise data centers and distributions.

## Intelligent SFP Diagnosis Mechanism

The IGS-10020HPT supports SFP-**DDM** (Digital Diagnostic Monitor) function that greatly helps network administrator to easily monitor real-time parameters of the SFP, such as optical output power, optical input power, temperature, laser bias current, and transceiver supply voltage.

## Modbus TCP provides Flexible Network Connectivity for Factory Automation

With the supported **Modbus TCP/IP** protocol, the IGS-10020HPT can easily integrate with **SCADA** systems, **HMI** systems and other data acquisition systems in factory floors. It enables administrators to remotely monitor the industrial Ethernet switch's **operating information, port information** and **communication status**, thus easily achieving enhanced monitoring and maintenance of the entire factory.

## 1588 Time Protocol for Industrial Computing Networks

The IGS-10020HPT is ideal for telecom and Carrier Ethernet applications, supporting MEF service delivery and timing over packet solutions for IEEE 1588 and synchronous Ethernet.

## 2. PRODUCT FEATURES

### ➤ **Physical Port**

- 8 10/100/1000BASE-T Gigabit Ethernet RJ45 ports with IEEE 802.3at PoE+ Injector
- 2 100/1000BASE-X mini-GBIC/SFP slots for SFP type auto detection
- One RJ45 console interface for basic management and setup

### ➤ **Power over Ethernet**

- Complies with IEEE 802.3at Power over Ethernet Plus/end-span PSE
- Up to 8 IEEE 802.3af/802.3at devices powered
- Supports PoE power up to 36 watts for each PoE port
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Remote power feeding up to 100m
- PoE management features
  - PoE admin-mode control
  - PoE management mode selection
  - Per port PoE function enable/disable
  - PoE port power feeding priority
  - Per PoE port power limit
  - PoE Port Status monitoring
  - PD classification detection
  - Sequence port PoE
- Intelligent PoE features
  - PoE Legacy mode enable/disable
  - Temperature threshold control
  - PoE usage threshold control
  - PoE schedule
  - PD alive check
  - LLDP PoE Neighbors

### ➤ **Industrial Case and Installation**

- IP30 aluminum case protection
- DIN-rail and wall-mount design
- DC 12-48V, redundant power with polarity reverse protect function
- Supports EFT protection of 6000 VDC for power line
- Supports 6000 VDC Ethernet ESD protection
- -40 to 75 degrees C operating temperature

### ➤ **Digital Input and Digital Output**

- 2 Digital Input (DI)
- 2 Digital Output (DO)
- Integrate sensors into auto alarm system
- Transfer alarm to IP network via email and SNMP trap

➤ **Layer 2 Features**

- Prevents packet loss with back pressure (half-duplex) and IEEE 802.3x pause frame flow control (full-duplex)
  - High performance of Store-and-Forward architecture, and runt/CRC filtering eliminates erroneous packets to optimize the network bandwidth
    - Storm Control support
      - Broadcast/Multicast/Unicast
    - Supports **VLAN**
      - IEEE 802.1Q tagged VLAN
      - Up to 255 VLANs groups, out of 4094 VLAN IDs
      - Supports provider Bridging (VLAN Q-in-Q, IEEE 802.1ad)
      - Private VLAN Edge (PVE)
      - Port Isolation
      - MAC-based VLAN
      - Protocol-based VLAN
      - Voice VLAN
      - GVRP
        - Supports **Spanning Tree Protocol**
          - IEEE 802.1D Spanning Tree Protocol (STP)
          - IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
          - IEEE 802.1s Multiple Spanning Tree Protocol (MSTP), spanning tree by VLAN
          - BPDU Guard
  - Supports **Link Aggregation**
    - 802.3ad Link Aggregation Control Protocol (LACP)
    - Cisco ether-channel (static trunk)
    - Maximum 5 trunk groups with 2 ports per trunk group
    - Up to 4Gbps bandwidth (duplex mode)
  - Provides port mirror (1-to-1)
  - Port mirroring to monitor the incoming or outgoing traffic on a particular port
  - Loop protection to avoid broadcast loops
  - Supports ERPS (Ethernet Ring Protection Switching)
  - Provides ONVIF for co-operating with PLANET video IP surveillances

➤ **Layer 3 IP Routing Features**

- Supports maximum 32 static routes and route summarization

➤ **Quality of Service**

- Ingress Shaper and Egress Rate Limit per port bandwidth control
- 8 priority queues on all switch ports
- Traffic classification
  - IEEE 802.1p CoS
  - IP TOS/DSCP/IP precedence
  - IP TCP/UDP port number



- Typical network application
- Strict priority and Weighted Round Robin (WRR) CoS policies
- Supports QoS and In/Out bandwidth control on each port
- Traffic policing on the switch port
- DSCP remarking
- **Multicast**
  - Supports IGMP snooping v1, v2 and v3
  - Supports MLD snooping v1 and v2
  - Querier mode support
  - IGMP snooping port filtering
  - MLD snooping port filtering
  - Multicast VLAN Registration (MVR) support
- **Security**
  - IP Source Guard prevents IP spoofing attacks
  - IP address access management to prevent unauthorized intruder
  - Authentication
    - IEEE 802.1x Port-based/MAC-based network access authentication
    - Built-in RADIUS client to co-operate with the RADIUS servers
    - TACACS+ login users access authentication
    - RADIUS/TACACS+ users access authentication
  - Access Control List
    - IP-based Access Control List (ACL)
    - MAC-based Access Control List
  - Source MAC/IP address binding
  - **DHCP Snooping** to filter un-trusted DHCP messages
  - **Dynamic ARP Inspection** discards ARP packets with invalid MAC address to IP address binding
  - **IP Source Guard** prevents IP spoofing attacks
  - IP address access management to prevent unauthorized intruder
- **Management**
  - IPv4 and IPv6 dual stack management
  - Switch Management Interfaces
    - Console/Telnet Command Line Interface
    - Web switch management
    - SNMP v1, v2c, and v3 switch management
    - SSH/SSL secure access
  - **IPv6** IP Address/NTP/DNS management
  - Built-in Trivial File Transfer Protocol (TFTP) client
  - BOOTP and DHCP for IP address assignment
  - System Maintenance
    - Firmware upload/download via HTTP/TFTP
    - Reset button for system reboot or reset to factory default
    - Dual Images
  - DHCP Relay
  - DHCP Option82
  - DHCP Server Mode support



- User Privilege levels control
- NTP (Network Time Protocol)
- PTP (Precision Time Protocol)
- Link Layer Discovery Protocol (LLDP) and LLDP-MED
- Link OAM
- Modbus TCP/IP Industrial Protocol
- Network Diagnostic
  - ICMPv6/ICMPv4 Remote Ping
  - Cable Diagnostic technology provides the mechanism to detect and report potential cabling issues
- SMTP/Syslog remote alarm
- Four RMON groups (history, statistics, alarms and events)
- SNMP trap for interface Link up and Link down notification
- System Log
- SFP-DDM (Digital Diagnostic Monitor)
- PLANET Smart Discovery Utility for deployment management

### 3. PRODUCT SPECIFICATIONS

#### 3.1 MAIN COMPONENTS

<b>Switch ASIC:</b>	VITESSE VSC7428	x 1
<b>CPU:</b>	MIPS 416MHz (integrated with VSC7428)	x 1
<b>PoE Chipset:</b>	Microsemi PD69200C+PD69208M	x 1
<b>Flash:</b>	MX25L12845EMI-10G 16Mbytes	x 1
<b>DDR RAM:</b>	MT47H128M8-CF-25E 128Mbytes	x 1

#### 3.2 FUNCTION SPECIFICATIONS

<b>Product</b>	<b>IGS-10020HPT</b>
<b>Hardware Specifications</b>	
<b>Version</b>	3
<b>Copper Ports</b>	8 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports
<b>SFP/mini-GBIC Slots</b>	2 1000BASE-SX/LX/BX SFP interfaces (Port-9 and Port-10) Compatible with 100BASE-FX SFP
<b>Console</b>	1 x RJ45-to-RS232 serial port (115200, 8, N, 1)
<b>Switch Architecture</b>	Store-and-Forward
<b>Switch Fabric</b>	20Gbps/non-blocking
<b>Throughput (packet per second)</b>	14.8Mpps@ 64Bytes packet
<b>Address Table</b>	8K entries, automatic source address learning and aging
<b>Shared Data Buffer</b>	4Mbits
<b>Flow Control</b>	IEEE 802.3x pause frame for full-duplex Back pressure for half-duplex

<b>Jumbo Frame</b>	9Kbytes
<b>Reset Button</b>	< 5 sec: System reboot > 5 sec: Factory default
<b>ESD Protection</b>	6KV DC
<b>EFT Protection</b>	6KV DC
<b>Enclosure</b>	IP30 aluminum case
<b>Installation</b>	DIN-rail kit and wall-mount kit
<b>Connector</b>	Removable 6-pin terminal block for power input Pin 1/2 for Power 1, Pin 3/4 for fault alarm, Pin 5/6 for Power 2 Removable 6-pin terminal block for DI/DO interface Pin 1/2 for DI 1 & 2, Pin 3/4 for DO 1 & 2, Pin 5/6 for GND
<b>Alarm</b>	One relay output for power failure. Alarm Relay current carry ability: 1A @ DC 24V
<b>DI/DO</b>	2 Digital Input (DI): Level 0: -24V~2.1V ( $\pm 0.1V$ ) Level 1: 2.1V~24V ( $\pm 0.1V$ ) Input Load to 24V DC, 10mA max. 2 Digital Output (DO): Open collector to 24V DC, 100mA max.
<b>LED Indicator</b>	<b>System:</b> Power 1 (Green) Power 2 (Green) Fault Alarm (Green) Ring (Green) R.O. (Ring Owner) (Green) <b>Per 10/100/1000T RJ45 Ports:</b> PoE-in-Use (Orange) LNK/ACT (Green) <b>Per SFP Interface:</b> 1000 (Orange) LNK/ACT (Green)
<b>Power Requirements</b>	DC 12-48V
<b>Power Consumption</b>	218 watts/743BTU (Full loading with PoE function)
<b>Power Over Ethernet</b>	
<b>PoE Standard</b>	IEEE 802.3at Power over Ethernet Plus/PSE
<b>PoE Power Supply Type</b>	End-span
<b>PoE Power Output</b>	Per port 52V DC, 350mA; max. 15.4 watts (IEEE 802.3af) Per port 52V DC, 590mA; max. 36 watts (IEEE 802.3at)
<b>Power Pin Assignment</b>	1/2(+), 3/6(-)
<b>PoE Power Budget</b>	60W maximum (DC 12V power input) 120W maximum (DC 24V power input) 240W maximum (DC 48V power input)
<b>Max. Number of Class 2 PDs @ 7 watts</b>	8
<b>Max. Number of Class 3 PDs @ 15.4 watts</b>	8
<b>Max. Number of Class 4 PDs @ 30.8 watts</b>	8

Layer 2 Function	
<b>Basic Management Interfaces</b>	Console; Telnet; Web browser; SNMP v1, v2c
<b>Secure Management Interfaces</b>	SSH, SSL, SNMP v3
<b>ONVIF</b>	ONVIF device discovery ONVIF device monitoring Floor Map
<b>Port Configuration</b>	Port disable/enable Auto-negotiation 10/100/1000Mbps full and half duplex mode selection Flow control disable/enable
<b>Port Status</b>	Display each port's speed duplex mode, link status, flow control status, auto negotiation status, trunk status
<b>Port Mirroring</b>	TX/RX/both 1 to 1 monitor
<b>VLAN</b>	802.1Q tagged based VLAN, up to 255 VLAN groups Q-in-Q tunneling Private VLAN Edge (PVE) MAC-based VLAN Protocol-based VLAN Voice VLAN GVRP MVR (Multicast VLAN Registration) Up to 255 VLAN groups, out of 4094 VLAN IDs
<b>Link Aggregation</b>	IEEE 802.3ad LACP/static trunk Supports 5 trunk groups with 2 ports per trunk group
<b>QoS</b>	Traffic classification based, strict priority and WRR 8-level priority for switching <ul style="list-style-type: none"> <li>- Port number</li> <li>- 802.1p priority</li> <li>- 802.1Q VLAN tag</li> <li>- DSCP/TOS field in IP packet</li> </ul>
<b>IGMP Snooping</b>	IGMP (v1/v2/V3) snooping, up to 255 multicast groups IGMP querier mode support
<b>MLD Snooping</b>	MLD (v1/v2) snooping, up to 255 multicast groups MLD querier mode support
<b>Access Control List</b>	IP-based ACL/MAC-based ACL Up to 123 entries
<b>Bandwidth Control</b>	Per port bandwidth control Ingress: 500Kb~1000Mbps Egress: 500Kb~1000Mbps

<b>Storm Control</b>	Unicast/Multicast/Broadcast
<b>SNMP MIBs</b>	RFC-1213 MIB-II IF-MIB RFC-1493 Bridge MIB RFC-1643 Ethernet MIB RFC-2863 Interface MIB RFC-2665 Ether-Like MIB RFC-2819 RMON MIB (Group 1, 2, 3 and 9) RFC-2737 Entity MIB RFC-2618 RADIUS Client MIB RFC-2933 IGMP-STD-MIB RFC3411 SNMP-Frameworks-MIB IEEE 802.1X PAE LLDP MAU-MIB Power over Ethernet MIB
<b>Layer 3 Function</b>	
<b>IP Interfaces</b>	Max. 8 VLAN interfaces
<b>Routing Table</b>	Max. 32 routing entries
<b>Routing Protocols</b>	IPv4 software static routing IPv6 software static routing
<b>Standards Conformance</b>	
<b>Stability Testing</b>	IEC60068-2-32 (free fall) IEC60068-2-27 (shock) IEC60068-2-6 (vibration)
<b>Standards Compliance</b>	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/100BASE-FX IEEE 802.3z Gigabit SX/LX IEEE 802.3ab Gigabit 1000T IEEE 802.3x flow control and back pressure IEEE 802.3ad port trunk with LACP IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol IEEE 802.1p Class of Service IEEE 802.1Q VLAN tagging IEEE 802.1x Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet Plus RFC 768 UDP RFC 793 TFTP RFC 791 IP RFC 792 ICMP RFC 2068 HTTP RFC 1112 IGMP v1 RFC 2236 IGMP v2

**3.3 PHYSICAL SPECIFICATIONS:**


■ **Dimensions:**

72 x 107 x 152 mm

■ **Weight:**


1096g

■ **Diagram:**

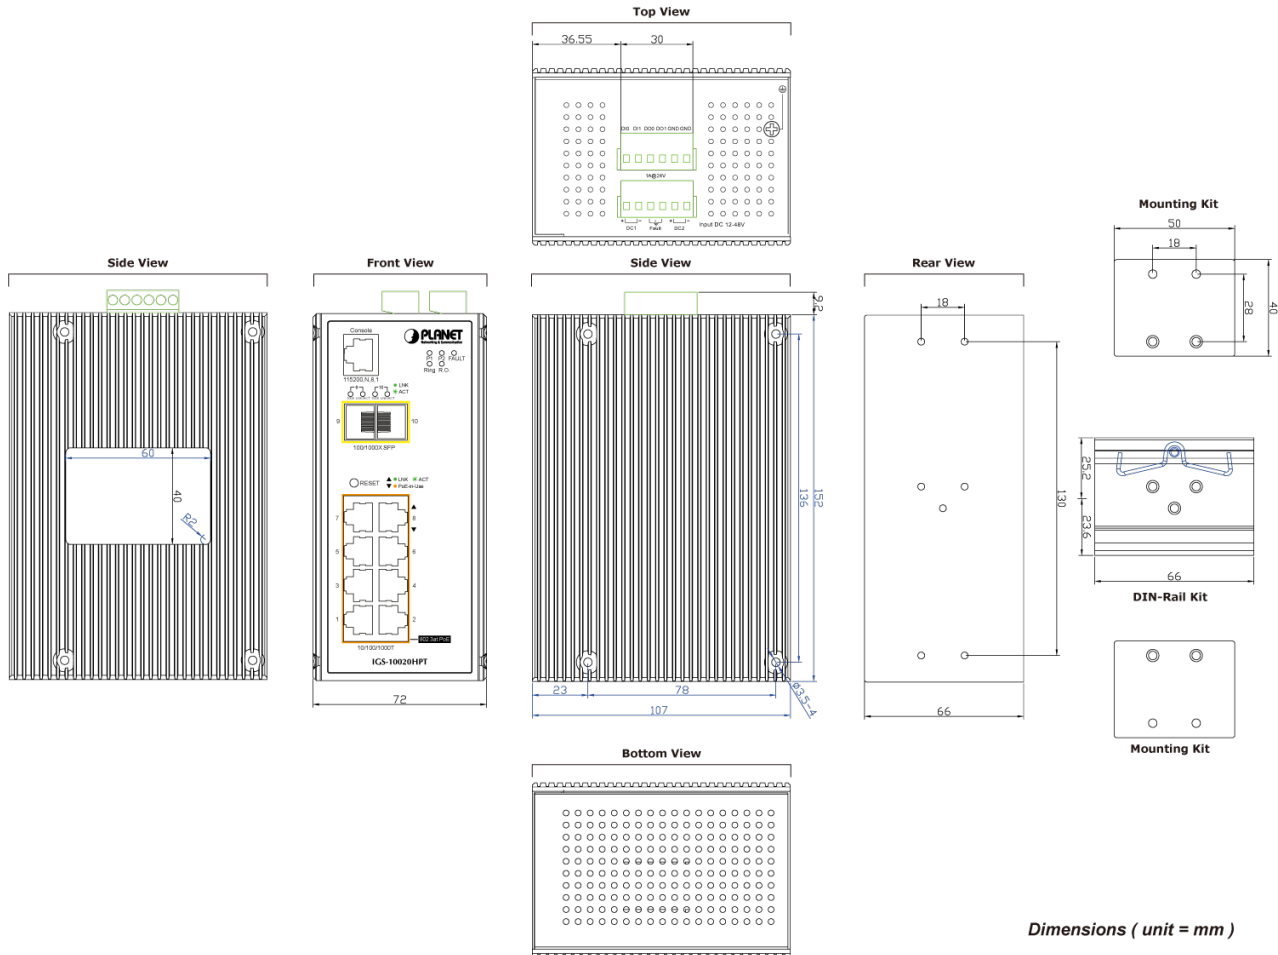

Dimensions ( unit = mm )

■ Front Panel:

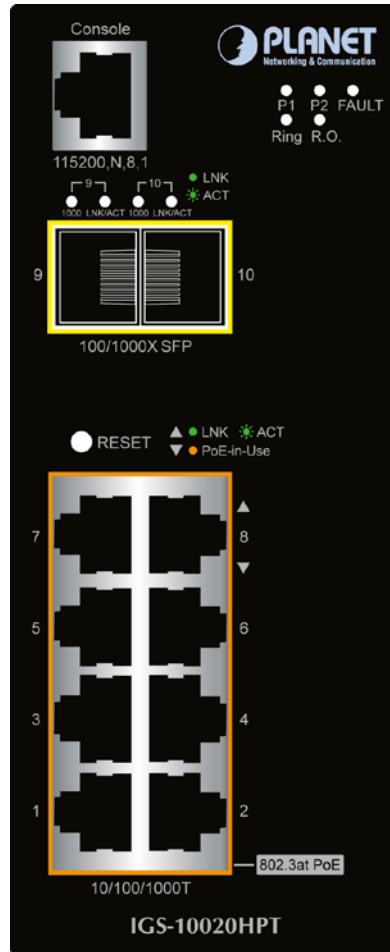

■ LED Definition

System

LED	Color	Function
P1	Green	Lights to indicate that the Switch has power.
P2	Green	Lights to indicate that the Switch has power.
Fault	Green	Lights to indicate power failure.
Ring	Green	Lights to indicate that the ERPS Ring has been created successfully.
R.O.	Green	Lights to indicate that Switch has been enabled to Ring Owner.


Per 10/100/1000Mbps Port with PoE

LED	Color	Function
10/100/1000 LNK/ACT	Green	Lights to indicate the port is running in <b>10/100/1000Mbps</b> speed and successfully established. Blinks to indicate that the switch is actively sending or receiving data over that port.
PoE-in-Use	Orange	Lights: To indicate the port is providing 52V DC in-line power. Off: To indicate the connected device is not a PoE Powered Device (PD).

**SFP 100/1000Mbps (Port-9, Port-10 mini-GBIC)**

LED	Color	Function	
LNK/ACT	Green	<b>Lights</b>	To indicate the link through that port is successfully established.
		<b>Blinks</b>	To indicate that the Switch is actively sending or receiving data over that port.
1000	Orange	<b>Lights</b>	To indicate that the port is successfully connecting to the network at 1000Mbps.
		<b>Off</b>	To indicate that the port is successfully connecting to the network at 100Mbps.

■ Upper Panel:

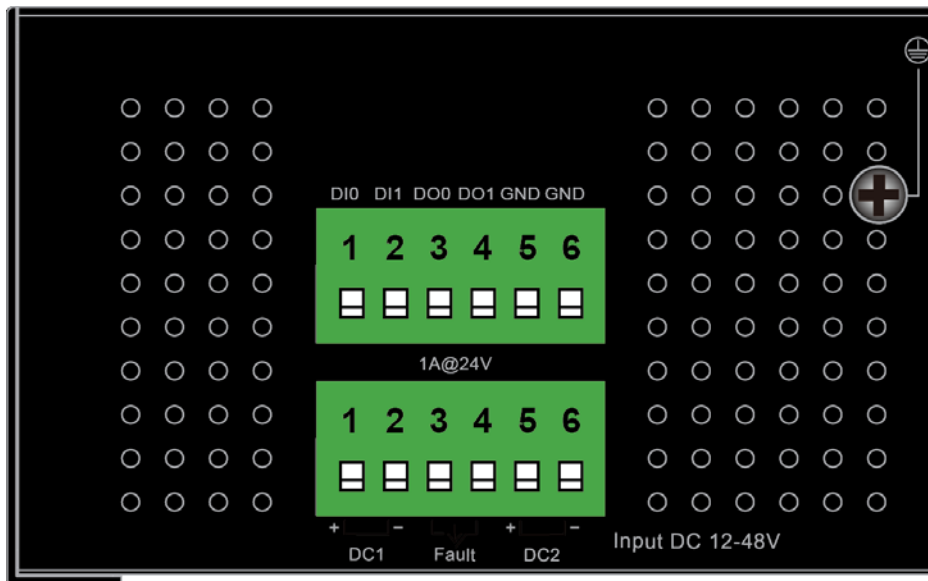




■ **DI & DO Connectors:**

Input Lv. 0: -30~2.1VDC

Input Lv. 1: 2.1~30VDC

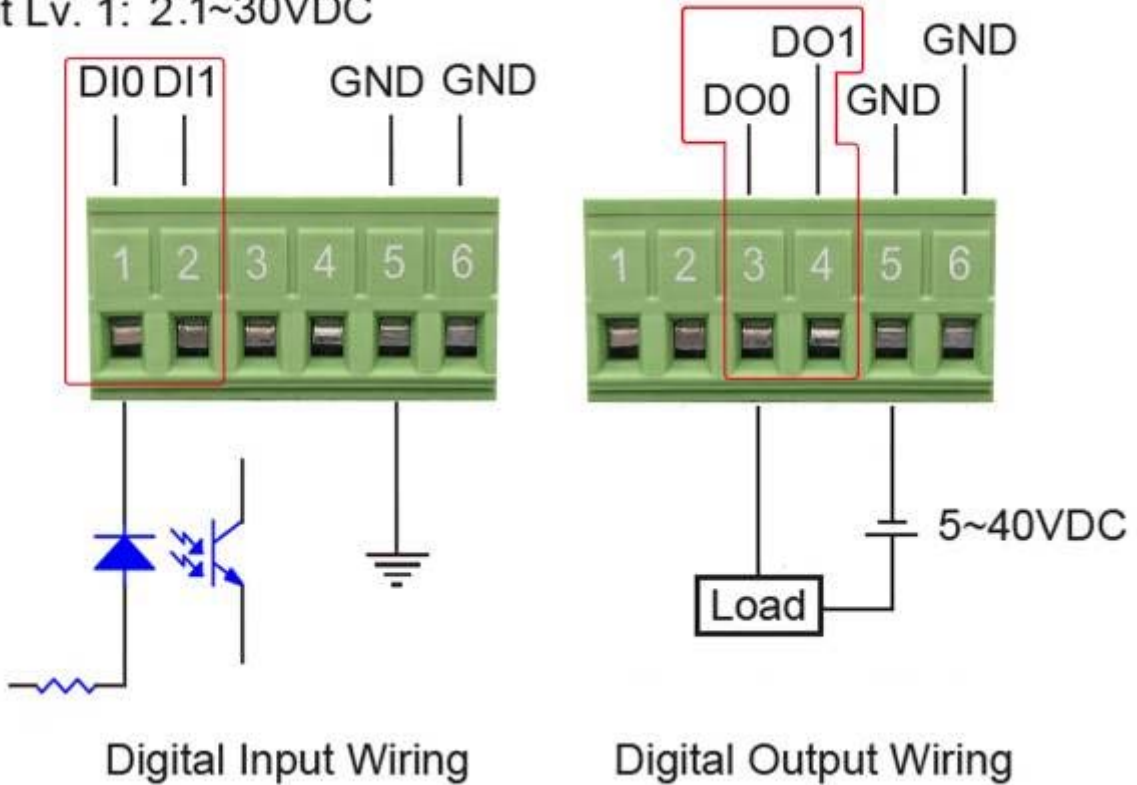

Digital Input Wiring

Digital Output Wiring

**3.4 ENVIRONMENTAL SPECIFICATIONS**

**Operating:**

**Temperature:** -40 ~ 75 degrees C

**Relative Humidity:** 5% ~ 95% (non-condensing)

**Storage:**

**Temperature:** -40 degrees C ~ 85 degrees C

**Relative Humidity:** 5% ~ 95% (non-condensing)

**3.5 ELECTRICAL SPECIFICATIONS**

**Power Requirements:** 12-48V DC

**Power Consumption:**

LOADING INPUT	System on without any devices attached	Port-1~Port-10 Link Up with Full Load (with maximum 8-port PoE+ Load)
12V	8 watts/27BTU	64 watts/218BTU (IEEE 802.3at PoE x2)
24V	10watts/34BTU	116watts/395BTU (IEEE 802.3at PoE x4)
48V	11watts/37BTU	218watts/743BTU (IEEE 802.3at PoE x8)

### 3.6 REGULATORY COMPLIANCE

#### CE, FCC Class A

#### Stability Testing:

- IEC60068-2-32 (free fall)
- IEC60068-2-27 (shock)
- IEC60068-2-6 (vibration)

### 3.7 RELIABILITY

MTBF > 100,000 hrs @ 25 degrees C

### 3.8 BASIC PACKAGING

- The IGS-10020HPT x 1
- Quick Installation Guide x 1
- DIN Rail Kit x 1
- Wall Mounting Kit x 1
- DB9 to RJ45 Interface RS232 Console Cable x 1
- Dust Cap (Please refer to the table below.)

Item	RJ45 Dust Cap	SFP Dust Cap
IGS-10020HPT	9	2

### 3.9 PACKING INFORMATION

<b>Box Dimensions (W x D x H):</b>	300 x 170 x 90 mm
<b>Gross Weight:</b>	1.65kg
<b>Carton Dimensions (W x D x H):</b>	370 x 325 x 470 mm
<b>Total Weight:</b>	16.5kg
<b>Quantity:</b>	10pcs per carton